


***Classic Series™, Perforated  
Aluminum Radiant Barrier – Data Sheet***

**Applications**

- Under Roof Decking
- Stapled up in Attics
- House Wrap
- Floors and Crawl Spaces
- Metal Buildings
- Hybrid Walls with Closed Cell Spray Foam & Radiant Barrier
- Attic Knee Walls
- Industrial Applications

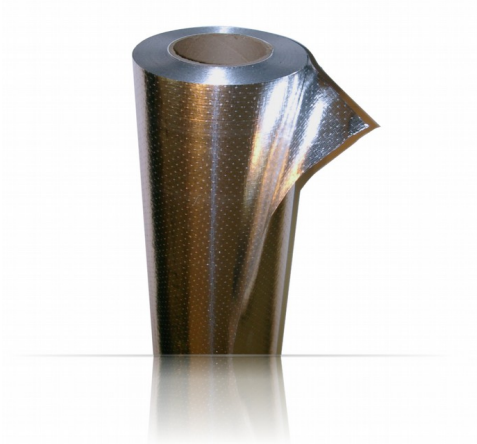

**Specifications**

- Sizes: 48" wide by 125 or 250 feet
- Double Sided Radiant Barrier
- Perforated (breathable)
- Contains 99.5% pure Aluminum
- Emissivity: 0.03 (ASTM C1371-98)
- Reflectivity: 97% (ASTM C1371-98)
- Class A / Class 1 Fire Rating
- Flame Spread: 0 (ASTM E84-10b)
- Smoke Development: 10 (ASTM E84-10b)
- Clean and Non-Toxic
- Water Vapor Permeability:  $>5 \text{ g}/(\text{hr}\cdot\text{ft}^2)$
- Thickness: 5 mil
- Weight: 30 lbs per 1000 sf roll

